STEALTH PRO™

GPSTEALTHPRO.COM

©GREAT PLAINS MFG., INC. 3196-GPM

Great Plains

STEALTH PRO™

THE HUNT STARTS HERE

STEALTH PRO™

BY GREAT PLAINS

FOOD PLOT & HABITAT DRILLS & LAND MANAGEMENT TOOLS

THE **STEALTH PRO** EQUIPMENT SERIES BY GREAT PLAINS WAS CREATED TO SUPPORT THE UNIQUE NEEDS OF **HUNTERS**, **CONSERVATIONISTS**, AND **WILDLIFE ENTHUSIASTS**. KEEPING TODAY'S OUTDOORSMAN IN MIND, THE STEALTH PRO LINE USES THE SAME QUALITY AND MANUFACTURING STANDARDS AS OUR PRODUCTION FARM EQUIPMENT, WHICH HAS BEEN PRODUCED **SINCE 1976** – WHILE ALSO KEEPING SIMPLICITY AND FUNCTIONALITY AT THE FOREFRONT.

FOR MANY YEARS, **GREAT PLAINS** HAS BEEN THE TRUSTED CHOICE FOR PHEASANTS FOREVER CHAPTERS AND THE NRCS FOR FOOD, HABITAT, AND CONSERVATION PLOTS, AS WELL AS A FAVORITE OF MANY HUNTERS, **WILDLIFE OUTFITTERS**, AND CUSTOM FOOD PLOT BUSINESSES. GREAT PLAINS HAS ALSO PARTNERED WITH SOME OF TODAY'S TOP OUTDOOR BRANDS LIKE **MIDWEST WHITETAIL** AND **ALL IN OUTDOORS WITH JASON SAY**.





3-PT

3' - 6' & 8' 3-PT MOUNTED NO-TILL

7' ROTARY CUTTER

LAND MANAGEMENT

6' & 8' DISK HARROW

PULL-TYPE

6' & 10' END WHEEL NO-TILL

Great Plains

STEALTH PRO 6 | STEALTH PRO 8 | STEALTH PRO 10

FEATURES & BENEFITS



TIME-TESTED OPENER

This trusted opener is lighter, shorter, and features an integrated leading coulter. The 5/16" fluted coulter penetrates tough no-till soil conditions while the double-disc opener blades cleanly slice through residue. A full-length seed tube and trailing flap control the seed to the very bottom of the seed trench where the seed stays in place.



CONVENIENT TRANSPORT

At the end of the job, three-point models (Cat. II) are simply lifted to quickly move the unit on down the road. Pull-type models are equipped with DOT-ready tires, and can be locked up with the drive disengaged for easy transport.




4-SPEED GEARBOX

Changing seed rates is quick and effortless with these permanently lubricated, sealed gearboxes. For quick reference, rate charts for many common food plot seeds are provided on a decal under the seed box lid.



CENTER-MOUNTED DRIVE WHEEL

(3-pt models only) Eight settings allow the height of the ground drive wheel to be repositioned as needed. Center drive wheels drive the metering systems and assist in controlling coulter depth.

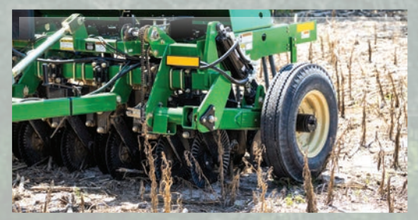

END WHEEL DRIVE

(Pull-type models only) Large end wheels provide excellent ground drive to the seed meters, even in rough, undulating terrain. Lockout hubs save drive components from wear during road transport.



EASY DEPTH CHANGES

Make seed depth changes quickly and effortlessly with the 18-position T-handle on each opener.



LARGE MAIN SEED BOX

The fully welded main seed box holds plenty of seed onboard to achieve maximum field time between fills. An optional small seeds box can be added to handle smaller seeds separately from the main seed box.



CLOSING WHEELS

The Stealth Pro™ Series drills feature 2"x13" smooth closing wheels. This design presses soil directly over the seed, aggressively firming the soil surrounding the seed at the precise depth selected.



FLUTED FEED CUPS

The exclusive 1¾" fluted feed cups with powdered metal flutes deliver outstanding accuracy with a large variety of seed shapes and sizes. The seed cup design maintains precise metering for small, large, or blended seed varieties.



STEEL WALKBOARDS

Sturdy, non-skid steel walk-boards provide full access to the seed box, making fills quick and convenient.



SMALL SEEDS METER *(optional)*

This smaller version of the fluted feed cup precisely meters small seeds. Having the small seeds meter separate from the main seed box makes it possible to drill different seeds at different rates at the same time.

ADDITIONAL STANDARD FEATURES

- Digital acremeter
- Hydraulic depth stop *(pull-type only)*
- Calibration crank
- Grease bank for easy maintenance
- Direct link press wheel for depth control
- Watertight manual holder
- Heavy-duty coil springs
- Spring steel coulter mounting bars
- Pintle or clevis hitch *(pull-type only)*
- LED safety lighting



3-POINT	Row Spacing	Working Width	Transport Width	Engine H.P. Required	Empty Weight (lbs.)	No. of Rows	Operating Depth	Main Box (Bu. Capacity)	Optional Small Seeds Box (Bu. Capacity)
STEALTH PRO 6	7.5"	5' 8"	6' 1"	60+	2,280	9	0" - 3.5"	12	1.4
STEALTH PRO 8	7.5"	8' 1"	8' 3"	80+	3,380	13	0" - 3.5"	14.3	1.9

PULL-TYPE	Row Spacing	Working Width	Transport Width	Engine H.P. Required	Empty Weight (lbs.)	No. of Rows	Operating Depth	Main Box (Bu. Capacity)	Optional Small Seeds Box (Bu. Capacity)
STEALTH PRO 6	7.5"	5' 8"	8' 10"	40+	2,700	9	0" - 3.5"	12	1.4
STEALTH PRO 10	7.5"	10'	12' 7"	75+	4,300	15	0" - 3.5"	23.7	2.4

See GreatPlainsAg.com for complete specifications. Specifications are subject to change without prior notification. Images may not depict current or standard production models.

Great Plains

STEALTH PRO 3 STEALTH PRO 4 STEALTH PRO 5

FEATURES & BENEFITS



TIME-TESTED OPENER
This trusted Great Plains opener features double-disc opener blades to cleanly cut through residue, leaving a residue-free zone for the trailing press wheels. A full-length seed tube controls the seed to the very bottom of the trench where the seed stays in place.



COULTER OPTION
Models are also available with a leading coulter. These 5/16" fluted coulters slice through residue and loosen compacted soils ahead of the double-disc opener blades.



CLOSING WHEELS
The Stealth Pro™ Series drills feature 2"x13" smooth closing wheels. This design presses soil directly over the seed, aggressively firming the soil surrounding the seed at the precise depth selected.



HITCH COMPATIBILITY OPTIONS
The 3-point pins pair with Cat. I or Cat. II hitches and are quick-hitch compatible.



SEED BOX AGITATOR
Agitators inside the box keep seed moving and flowing freely.




STURDY SEED BOX/LID
For easy access, the calibration crank is stored underneath the seed box lid. A decal that shows rate charts for many common food plot seed mixes is also located under the lid.



DRIVE WHEEL ADJUSTMENT
The drive wheel height is easily adjusted with the set screw handles.



SEED RATE ADJUSTMENT
Use the seed rate adjustment handle located behind the box to easily change seed rates.

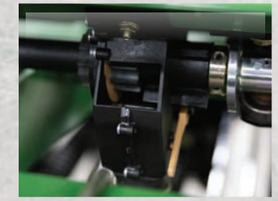

FLUTED FEED CUPS
The exclusive 1¾" fluted feed cups with powdered metal flutes deliver outstanding accuracy with a large variety of seed shapes and sizes.



LOW-PROFILE BOX
Low-profile, all-welded box design prevents branches and vines from catching on the sides. Non-skid diamond grip steel walkboards provide full access to the seed box, making fills quick and convenient.



FOLD-AWAY PARKING STANDS
Stands have been added for stability in shipping and to keep the openers off the ground during storage.



CALIBRATION CRANK
Safely and easily calibrate the fluted meters by using the provided calibration crank to meter seed samples. The crank is conveniently mounted inside the main box lid for quick access and weatherproof storage.



EASY DEPTH CHANGES
Make seed depth changes quickly and effortlessly with the 18-position T-handle on each opener.

3-PT




WITHOUT COULTERS	Working Width	Transport Width	No. of Cups	Opener Spacing	Seed Box (Bu. Capacity)	Engine H.P. Required	Empty Weight (lbs.)
STEALTH PRO 3	37.5"	41.5"	5	7.5"	6	20-30	860
STEALTH PRO 4	45"	48.25"	6	7.5"	8	30-40	990
STEALTH PRO 5	60"	62.5"	8	7.5"	10	40-50	1,150




WITH COULTERS	Working Width	Transport Width	No. of Cups	Opener Spacing	Seed Box (Bu. Capacity)	Engine H.P. Required	Empty Weight (lbs.)
STEALTH PRO 3	37.5"	41.5"	5	7.5"	6	45-60	1,290
STEALTH PRO 4	45"	48.25"	6	7.5"	8	60-70	1,510
STEALTH PRO 5	60"	62.5"	8	7.5"	10	70-80	1,790

See GreatPlainsAg.com for complete specifications. Specifications are subject to change without prior notification. Images may not depict current or standard production models.

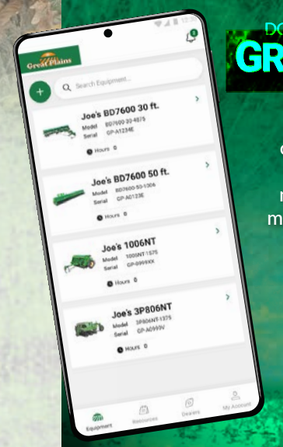

DOWNLOAD THE **GREATPLAINSAG APP**

to calibrate your drill with the step-by-step calibration assistant, and access manuals, specs, maintenance guides, and more right from your phone.

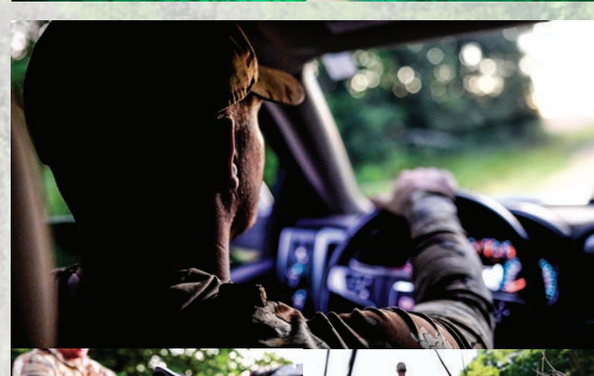



Great Plains

STEALTH PRO RC7 ROTARY CUTTER

FEATURES & BENEFITS



QUICK-HITCH COMPATIBLE
The Cat. I & II 3-point hitch is quick-hitch compatible. This allows you to quickly connect and disconnect from the implement.



GEARBOX WARRANTY
Gearboxes are built to last and provide quality performance. Each gearbox is covered by a 10-year limited warranty.



STUMP JUMPER
This 6-gauge stump jumper (3/16" x 27") has a 1" thick blade bar that allows you to slide over stumps, rocks, and other debris.



FLOATING TOP LINK
The floating top link simplifies hookup and allows the deck to follow the terrain for an even cut.



EXTENDED CUTTER FRONT
The extended front of the cutter increases material flow and provides added protection.





2" CUTTING CAPACITY
These cutters handle stalks and stumps up to 2" in diameter.



ROUND BACK DESIGN
The rounded back helps discharge debris better than enclosed or partially enclosed cutters found on some competitive units.



11 15/16" DECK HEIGHT
The deck is engineered with the right amount of clearance to handle heavy cutting conditions.



15" LAMINATED TAILWHEEL
Laminated material is long lasting in tough conditions and will not go flat. A 1¼" spindle is heavy-duty to protect the tailwheel assembly from damage in rough terrain.



FRONT & REAR CHAIN GUARDS
The cutter features chain guards on the front and rear of the deck to safely and efficiently discharge debris for optimum material flow.

ADDITIONAL STANDARD FEATURES
- 1½"-12" cutting height
- Cat. 4 driveline with 2-plate slip-clutch
- Dual position, clevis-type, 3-point floating top link
- Boxed channel deck supports
- Fully-welded deck
- Full-length skid shoes
- ½"-4" heat-treated, free swinging blades
- Splined blade bar hub
- Spring-loaded driveline holder



ROTARY CUTTER	Working Width	Transport Width	Weight (lbs.)	Engine H.P. Required	Hitch Type	Cutting Height	Cutting Capacity	Deck Height	Blades	Blade Tip Speed	Stump Jumper / Dishpan	Gearbox Rating	Gearbox
STEALTH PRO RC7	84"	89"	1,160	45-90	3-Point	1.5"-12"	2" Diameter	11-15/16"	1/2" x 4" (2)	17,113 fpm	Oval (3/16" x 27")	130 HP	540 RPM

See GreatPlainsAg.com for complete specifications. Specifications are subject to change without prior notification. Images may not depict current or standard production models.

Great Plains

STEALTH PRO DH6/DH8 DISK HARROW

FEATURES & BENEFITS



WORKING WIDTHS
Stealth Pro Series Disk Harrows are offered in two working widths: 6' (72") wide for the DH6 and 8' (96") wide for the DH8.



SQUARE FRAME TUBING
Stronger than angle iron, our tubing comes in 2½" for the DH6, and 3" for the DH8. The DH8 frame can handle 100 HP tractors.



QUICK-HITCH COMPATIBLE
The Cat. I (DH6 & DH8) & II (DH8) 3-point hitch is quick-hitch compatible. This allows you to quickly connect and disconnect from the implement.




NOTCHED BLADES
The notched blades provide aggressive digging and cutting action for better penetration than smooth blades. The DH6 is fitted with 18" blades, while the DH8 model utilizes 20" blades.






FRONT & REAR GANG ANGLES
Front and rear gangs adjust to adapt the aggressiveness to fit your conditions. Gangs have three or four preset angle settings, depending on the model.

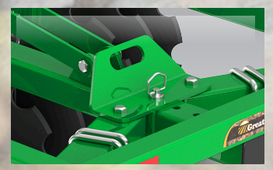


GANG ADJUSTMENT HANDLE
Use the built-in handle to make gang-angle changes quickly – no additional tools are required.

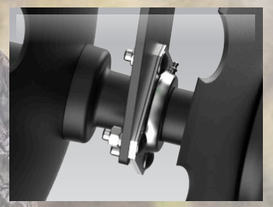

SEALED, GREASEABLE BALL BEARINGS
Self-aligning, sealed, greaseable ball bearings offer long life while working through difficult terrain.



HEAVY-DUTY BEARING HANGERS
Heavy-duty hangers resist the high torque from U-bolts and keep the discs out of the ground.

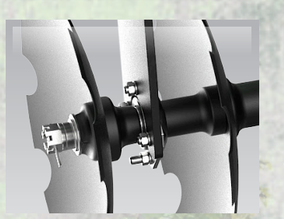

HIGH CARBON STEEL SQUARE GANG AXLES
Large axles add strength in difficult conditions, resisting high loads as the blades roll through the ground.

ADDITIONAL STANDARD FEATURES

- 3" x 2" gang tube / 1" square gang axles (DH6)
- 4" x 3" gang tube / 1⅛" square gang axles (DH8)
- ⅜" thick bearing hangers / 2 ea. ⅝" U-bolts (DH6)
- ½" thick bearing hangers / 2 ea. ⅝" U-bolts (DH8)
- ½" frame side plates for strength and reinforcement (DH6)
- ¾" front / ⅝" back frame side plates for strength and reinforcement (DH8)



DISK HARROW	Working Width	Weight (lbs.)	Weight per Blade (lbs.)	Engine H.P. Required	Hitch Type	Blades	Blade Spacing	Bearing Hanger	Gang Angle
STEALTH PRO DH6	72"	714	34	<65	Cat. I	20 (18")	7-1/2"	3/8" plate, 5/8" U-bolts (2 ea.)	0°, 7°, 14°, 21°
STEALTH PRO DH8	96"	1,143	48	40-100	Cat. I & II	24 (20")		1/2" plate, 5/8" U-bolts (2 ea.)	0° (front only), 7°, 14°, 21°

See GreatPlainsAg.com for complete specifications. Specifications are subject to change without prior notification. Images may not depict current or standard production models.